




Detachable Cables 3.5mm  
c/w Ø23.5mm Bell Housing

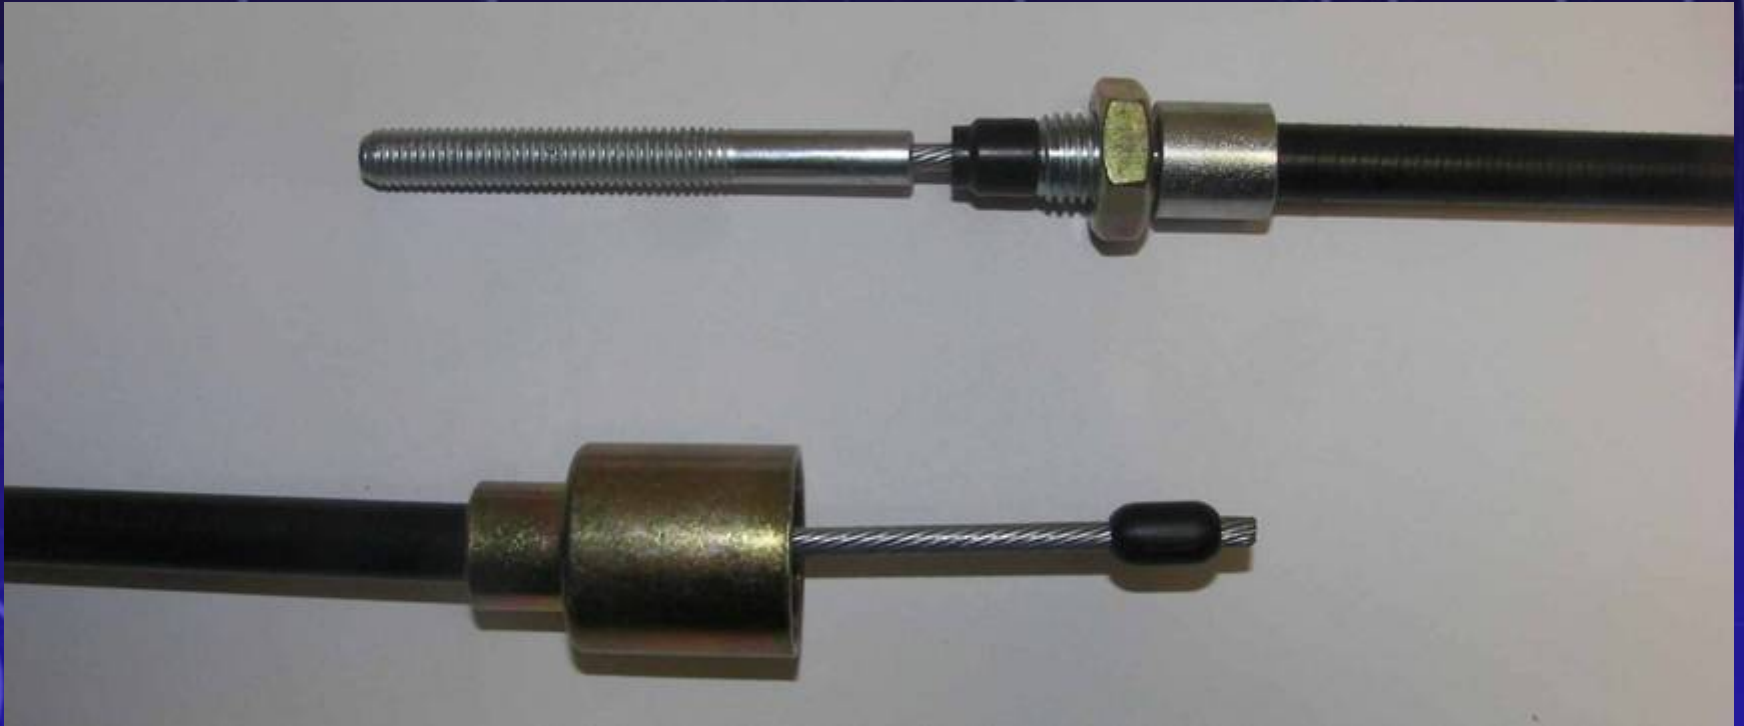

## Detachable Cables 3.5mm c/w Ø23.5mm Bell Housing

Inner / Outer Length (mm)	Part Number
770 / 980	35122.03
890 / 1100	35122.04
890 / 1130	35122GN/890/1130
1020 / 1230	35122.05
1020 / 1260	35122GN/1020/1260
1130 / 1340	35122.06
1320 / 1530	35122.07
1320 / 1560	35122GN/1320/1560
1430 / 1640	35122.08
1620 / 1830	31522.09
1790 / 2000	35122.10
1930 / 2140	35122/1930/2140
1990 / 2200	35122/1990/2200

## Detachable Cables 3.5mm c/w Ø23.5mm Bell Housing

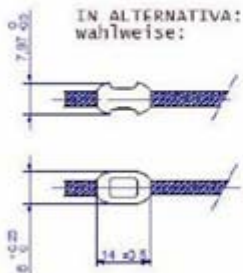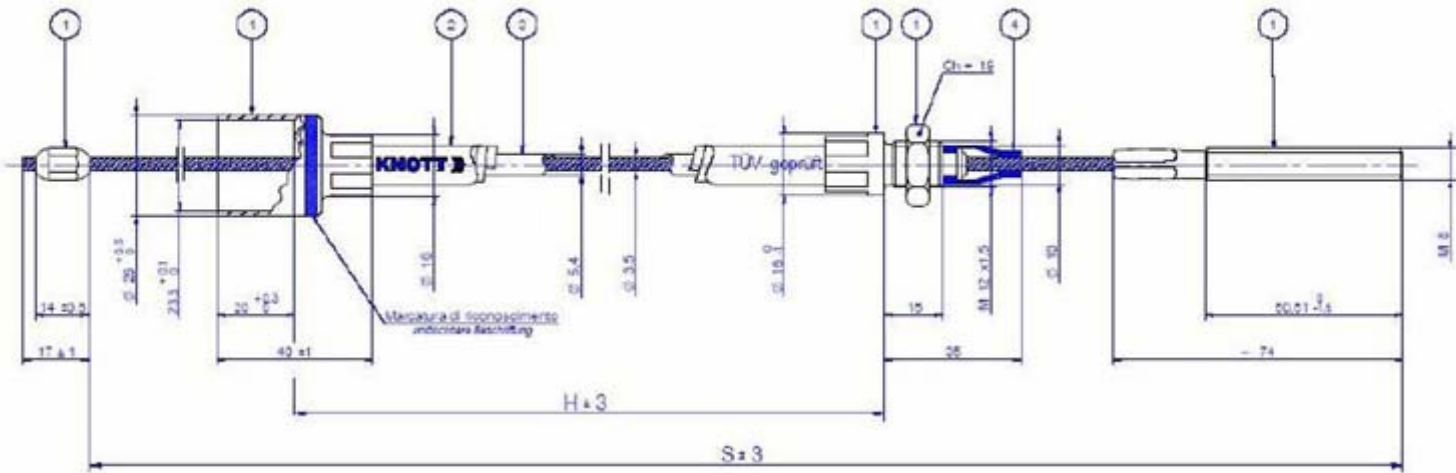

FINITURE SUPERFICIALI - Oberflächenbehandlung	
1 Zinato Fe/Zn 80C (Giallo) - DIN 50961 -	gelb
2 Polietilene NERO -	schwarz
3 Nylon 6 NEUTRO -	neutral
4 Gomma NBR 50-60 Sh -	schwarz

NOTA: per il cliente AL-KO impiegare solo ed esclusivamente il notolino con schiacciatura esagonale.

